






-  Global Service Network
-  Custom Design and Manufacturing
-  Customer Care and Support

Zhejiang Spaceman Ice Systems Co. Ltd.

SPACEMAN

COMMERCIAL ICE CREAM & FROZEN BEVERAGE EQUIPMENT



ABOUT US

Established in 1997, Spaceman is a leading manufacturer dedicated to designing and producing the highest quality soft serve ice cream, milkshake and frozen beverage machines. Through continuous development and innovation, Spaceman has grown into one of the largest enterprises in China that is solely focused and specialized in frozen equipment design and manufacturing.

Spaceman products are built with our patented, proprietary, and cutting-edge technologies in state-of-the-art manufacturing facilities. We manufacture our equipment to the highest quality and adhere to the strictest international standards in food and electrical safety. The Spaceman brand has obtained global recognition for its world class quality and service at competitive prices. Spaceman equipment has been delivered to over 130 countries and is supported by over 50 factory trained service and support teams around the globe. We strive to improve in every aspect of our business, products and services. Through continuous improvement and your needs in mind, we aim to solve your problems with creative ideas that work.



📍 Distribution Center

📍 Sales & Service Available




ADVANTAGE

Product & Technology



Service & Support

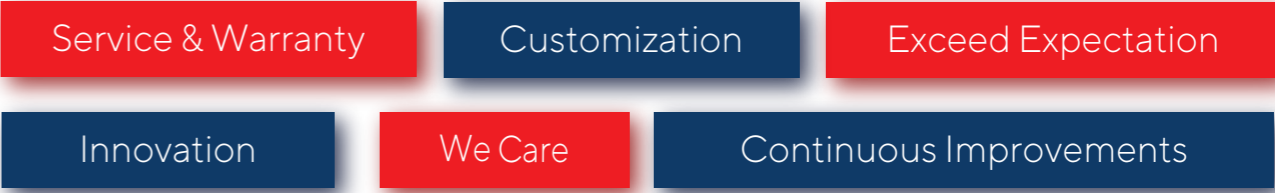

- 🏆 One year parts warranty
Labor and extended warranty available in select regions
- 👤 Technical support around the clock
- 🌐 Global service network
- 🚚 Standard warranty parts ship within 24 hours

- 👍 In-stock guarantee on all standard parts
- 👍 Competitive prices
- 👍 Low cost-of-ownership
- 👍 Engineered for reliability and durability

CONTENTS

Soft Serve Ice Cream

CLASSIC SERIES

Simple But Powerful

/04

PREMIER SERIES

High Performance & High Versatility

/07

ELITE SERIES

Auto-Pasteurization & Intelligent Controls

/11

Frozen Beverage

SLUSH

/15

SLUSH & SHAKE

/17

Soft Serve Ice Cream

CLASSIC SERIES



Fast Freeze Down

Patented high efficiency evaporator allows faster freeze down with lower energy consumption



Dispense Speed Control

Provides flexibility in dispense rate control for different applications



System Alarms and Protections

Alerts and protects with visual and audible alarms for low mix, low temperature and motor overload. Additional protections include thermal overload and system high pressure cutout



Hopper Refrigeration

Maintain product temperature below 4°C at all times



Auto Closing Dispensing Valves

Automatically prevents product overflow after dispense



Dispense Count

Provides flexibility in dispense rate control for different applications

Simple
But
Powerful

CLASSIC SERIES

Simple But
Powerful



6220E

Flavors	1
Capacity(80g)	200 serves/hr
Cylinders	1x1.7L
Hoppers	1x8L
Power (50Hz/60Hz)	1.8kW /1.8kW
Net/ShipWeight (Kg)	92/102
NetDimensions (mm)	421x604x745
ShipDimensions (mm)	480x760x890
PowerSupply	220V/1Ph/50Hz, 220V/1Ph/60Hz
AvailableOptions	None



6225 / 6225A

Flavors	2+Twist
Capacity(80g)	350 serves/hr
Cylinders	2x1.7L
Hoppers	2x12L (8L for A)
Power (50Hz/60Hz)	2.9kW /3.2kW
Net/ShipWeight (Kg)	155/170 165 /180 (A)
NetDimensions (mm)	552x652x955
ShipDimensions (mm)	610x780x1100
PowerSupply	220V/1Ph/50Hz, 220V/1Ph/60Hz
AvailableOptions	Water Cooled, Airchute



6240 / 6240A

Flavors	2+Twist
Capacity(80g)	400 serves/hr
Cylinders	2x1.7L
Hoppers	2x12L (8L for A)
Power (50Hz/60Hz)	2.9kW /3.2kW
Net/ShipWeight (Kg)	165/180 175 /190 (A)
NetDimensions (mm)	552x652x1474
ShipDimensions (mm)	650x820x1640
PowerSupply	220V/1Ph/50Hz, 220V/1Ph/60Hz
AvailableOptions	Water Cooled, Airchute




6268

Flavors	3+2Twist
Capacity(80g)	450 serves/hr
Cylinders	3x1.7L
Hoppers	3x8L
Power (50Hz/60Hz)	4.1kW /4.3kW
Net/ShipWeight (Kg)	250 /275
NetDimensions (mm)	612x653x1544
ShipDimensions (mm)	740x825x1710
PowerSupply	220V/1Ph/50Hz, 220V/1Ph/60Hz
AvailableOptions	Water Cooled, Airchute

Classic Series



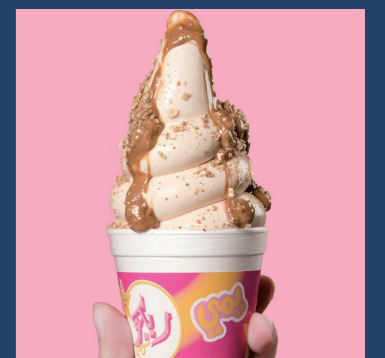






A: Pump Feed Model



High Performance



High Versatility

- 
Fast Freeze Down
 Patented high efficiency evaporator allows faster freeze down with lower energy consumption
- 
Microprocessor Control
 Microprocessor control provides access to system settings and offers additional functions. Digital interface displays critical information as system status, temperatures, dispense count, errors, etc.
- 
Hopper Agitators
 Maintain product consistency, prevent product separation
- 
Defrost for Cleaning
 Increases efficiency during cleaning by heating frozen product in cylinder
- 
Direct Drive Transmission
 Eliminates consumable moving parts and increases transmission efficiency
- 
Auto Programming
 Allows automatic switching of modes based on preset schedules
- 
System Alarms and Protections
 Alerts and protects with visual and audible alarms for low mix, low temperature and motor overload. Additional protections include thermal overload and system high pressure cutout
- 
Auto Closing Dispensing Valves
 Automatically prevents product overflow after dispense
- 
Dispense Speed Control
 Provides flexibility in dispense rate control for different applications
- 
Soft System Start
 Slow motor start reduces equipment noise and stress on drive train

Soft Serve Ice Cream

PREMIER SERIES

PREMIER SERIES

High Performance
High Versatility



6210-C / 6210A-C

Flavors	1
Capacity (80g)	150 serves/hr
Cylinders	1x1.2L
Hoppers	1x8L (5L for A)
Power (50Hz/60Hz)	1.8kW / 1.6kW
Net/ShipWeight (Kg)	90/102 100/112 (A)
Net Dimensions (mm)	284x649x778
Ship Dimensions (mm)	380x810x900
Power Supply	220V/1Ph/50Hz, 110V/1Ph/60Hz
Available Options	None



6228-C / 6228A-C

Flavors	1
Capacity (80g)	360 serves/hr
Cylinders	1x1.7L
Hoppers	1x12L (10L for A)
Power (50Hz/60Hz)	2.5kW / 2.7kW
Net/ShipWeight (Kg)	115/127 120/132 (A)
Net Dimensions (mm)	384x720x846
Ship Dimensions (mm)	500x870x990
Power Supply	220V/1Ph/50Hz, 220V/1Ph/60Hz
Available Options	Water Cooled, Airchute

Premier Series

A: Pump Feed Model



6236-C / 6236A-C

Flavors	1
Capacity (80g)	400 serves/hr
Cylinders	1x3.2L
Hoppers	1x12L (8L for A)
Power (50Hz / 60Hz)	2.5kW / 2.8kW
Net/ShipWeight (Kg)	139 / 152 144 / 157 (A)
Net Dimensions (mm)	454x681x930
Ship Dimensions (mm)	500x870x1080
Power Supply	220V/1Ph/50Hz, 220V/1Ph/60Hz
Available Options	Water Cooled, Airchute



6338-C / 6338A-C

Flavors	1
Capacity (80g)	400 serves/hr
Cylinders	1x3.2L
Hoppers	1x12L (10L for A)
Power (50Hz / 60Hz)	2.7kW / 2.7kW
Net/ShipWeight (Kg)	173 / 189 185 / 200 (A)
Net Dimensions (mm)	444x680x1549
Ship Dimensions (mm)	520x860x1680
Power Supply	380V/3Ph/50Hz, 220V/3Ph/60Hz
Available Options	Water Cooled, Airchute

6234-C / 6234A-C

Flavors	2+ Twist
Capacity (80g)	280 serves/hr
Cylinders	2x1.2L
Hoppers	2x8L (5L for A)
Power (50Hz / 60Hz)	1.9kW / 2.0kW
Net/ShipWeight (Kg)	126 / 141 135 / 150 (A)
Net Dimensions (mm)	444x705x897
Ship Dimensions (mm)	530x870x1020
Power Supply	220V/1Ph/50Hz, 220V/1Ph/60Hz
Available Options	Airchute



6250-C / 6250A-C

Flavors	2+ Twist
Capacity (80g)	450 serves/hr
Cylinders	2x1.7L
Hoppers	2x12L (8L for A)
Power (50Hz / 60Hz)	3.3kW / 3.6kW
Net/ShipWeight (Kg)	210 / 230 220 / 240 (A)
Net Dimensions (mm)	532x652x1474
Ship Dimensions (mm)	650x820x1640
Power Supply	220V/1Ph/50Hz, 220V/1Ph/60Hz
Available Options	Water Cooled, Airchute

6235-C / 6235A-C

Flavors	2+ Twist
Capacity (80g)	450 serves/hr
Cylinders	2x1.7L
Hoppers	2x12L (8L for A)
Power (50Hz / 60Hz)	3.3kW / 3.6kW
Net/ShipWeight (Kg)	186 / 200 196 / 210 (A)
Net Dimensions (mm)	532x651x977
Ship Dimensions (mm)	610x805x1100
Power Supply	220V/1Ph/50Hz, 220V/1Ph/60Hz
Available Options	Water Cooled, Airchute




6378-C / 6378A-C

Flavors	2+ Twist
Capacity (80g)	720 serves/hr
Cylinders	2x3.2L
Hoppers	2x12L (10L for A)
Power (50Hz / 60Hz)	4.7kW / 5.0kW
Net/ShipWeight (Kg)	253 / 273 263 / 283 (A)
Net Dimensions (mm)	532x704x1563
Ship Dimensions (mm)	710x890x1720
Power Supply	380V/3Ph/50Hz, 220V/3Ph/60Hz
Available Options	Water Cooled, Airchute

Premier Series

A: Pump Feed Model

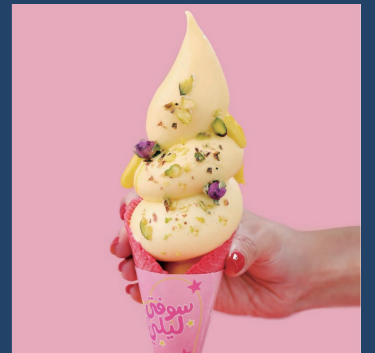

Soft Serve Ice Cream

ELITE SERIES

- 
Auto-Pasteurization
 Significantly reduces frequency of cleaning with scheduled daily auto-pasteurization
- 
Cleaning History Report
 Record and reports number of days since last cleaning; Reminds when cleaning is due
- 
Operation Logging
 Logs every operation and error to provide history and data for easy troubleshooting
- 
Lockout for Past Due Cleaning
 Locks out from normal operation until proper cleaning is performed to guarantee food safety

ELITE SERIES

Auto - Pasteurization & Intelligent Controls



6210AB-C

Flavors	1
Capacity (80g)	150 serves/hr
Cylinders	1x1.2L
Hoppers	1x5L
Power (50Hz/60Hz)	2.3kW / 2.5kW
Net/Ship Weight (Kg)	118 / 129
Net Dimensions (mm)	384x674x726
Ship Dimensions (mm)	450x820x950
Power Supply	220V/1Ph/50Hz, 220V/1Ph/60Hz
Available Options	Water Cooled, Airchute



6228AB-C

Flavors	1
Capacity (80g)	360 serves/hr
Cylinders	1x1.7L
Hoppers	1x10L
Power (50Hz/60Hz)	2.3kW / 2.5kW
Net/Ship Weight (Kg)	124 / 137
Net Dimensions (mm)	384x720x846
Ship Dimensions (mm)	500x870x990
Power Supply	220V/1Ph/50Hz, 220V/1Ph/60Hz
Available Options	Water Cooled, Airchute

Elite Series

A: Pump Feed Model
B: Pasteurization



6236AB-C

Flavors	1
Capacity (80g)	440 serves/hr
Cylinders	1x3.2L
Hoppers	1x12L
Power (50Hz / 60Hz)	2.9kW / 3.1kW
Net/Ship Weight (Kg)	170/186
Net Dimensions (mm)	454x681x976
Ship Dimensions (mm)	520x870x1180
Power Supply	380V/3Ph/50Hz, 220V/3Ph/60Hz
Available Options	Water Cooled, Airchute



6338AB-C

Flavors	1
Capacity (80g)	400 serves/hr
Cylinders	1x3.2L
Hoppers	1x10L
Power (50Hz / 60Hz)	2.9kW / 3.1kW
Net/Ship Weight (Kg)	188/198
Net Dimensions (mm)	444x680x1543
Ship Dimensions (mm)	520x860x1680
Power Supply	380V/3Ph/50Hz, 220V/3Ph/60Hz
Available Options	Water Cooled, Airchute



6234AB-C

Flavors	2 + Twist
Capacity (80g)	280 serves/hr
Cylinders	2x1.2L
Hoppers	2x5L
Power (50Hz / 60Hz)	2.3kW / 2.4kW
Net/Ship Weight (Kg)	145/160
Net Dimensions (mm)	444x705x880
Ship Dimensions (mm)	530x830x1080
Power Supply	220V/1Ph/50Hz, 220V/1Ph/60Hz
Available Options	Airchute



6368AB-C

Flavors	2 + Twist
Capacity (80g)	620 serves/hr
Cylinders	2x1.7L
Hoppers	2x8L
Power (50Hz / 60Hz)	4.6kW / 4.8kW
Net/Ship Weight (Kg)	250/270
Net Dimensions (mm)	532x652x1494
Ship Dimensions (mm)	650x820x1640
Power Supply	380V/3Ph/50Hz, 220V/3Ph/60Hz
Available Options	Water Cooled, Airchute



6235AB-C

Flavors	2 + Twist
Capacity (80g)	380 serves/hr
Cylinders	2x1.7L
Hoppers	2x5L
Power (50Hz / 60Hz)	2.4kW / 2.5kW
Net/Ship Weight (Kg)	154/170
Net Dimensions (mm)	444x705x880
Ship Dimensions (mm)	530x830x1080
Power Supply	220V/1Ph/50Hz, 220V/1Ph/60Hz
Available Options	Airchute



6378AB-C

Flavors	2 + Twist
Capacity (80g)	800 serves/hr
Cylinders	2x3.2L
Hoppers	2x10L
Power (50Hz / 60Hz)	5.5kW / 5.8kW
Net/Ship Weight (Kg)	273/295
Net Dimensions (mm)	553x706x1613
Ship Dimensions (mm)	770x890x1720
Power Supply	380V/3Ph/50Hz, 220V/3Ph/60Hz
Available Options	Water Cooled, Airchute

Elite Series

A: Pump Feed Model
B: Pasteurization



Frozen Beverage

SLUSH

Perfect solution for alcoholic and non-alcoholic frozen beverages in bars, restaurants, hospitals, schools and kiosks



6450-C


Flavors	1
Capacity (250ml)	80 serves/hr
Cylinders	1x3.8L
Hoppers	1x12L
Power (50Hz/60Hz)	1.4kW/1.4kW
Net/ShipWeight (Kg)	99/109
Net Dimensions (mm)	384x645x760
Ship Dimensions (mm)	420x790x890
Power Supply	220V/1Ph/50Hz, 220V/1Ph/60Hz
Available Options	Airchute, Spinner, Lightbox



6455-C

Flavors	2
Capacity (250ml)	112 serves/hr
Cylinders	2x3.8L
Hoppers	2x8.0L
Power (50Hz/60Hz)	2.0kW/1.9kW
Net/ShipWeight (Kg)	146/166
Net Dimensions (mm)	476x651x972
Ship Dimensions (mm)	520x800x1090
Power Supply	220V/1Ph/50Hz, 110V/1Ph/60Hz
Available Options	Airchute, Spinner, Lightbox

Slush

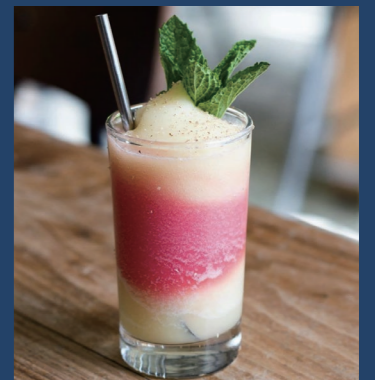



Frozen Beverage

SLUSH & SHAKE

Higher capacity solution
with greater flexibility to
serve larger crowds
alcoholic & non-alcoholic
frozen drinks including
milkshakes



6690-C

Flavors	1
Capacity (250ml)	240 serves/hr
Cylinders	1x6.9L
Hoppers	1x20L
Power (50Hz / 60Hz)	2.1kW / 2.3kW
Net/Ship Weight (Kg)	138 / 151
Net Dimensions (mm)	454x657x862
Ship Dimensions (mm)	520x860x980
Power Supply	220V/1Ph/50Hz, 220V/1Ph/60Hz
Available Options	Airchute, Spinner, Lightbox



6695-C

Flavors	2
Capacity (250ml)	320 serves/hr
Cylinders	2x6.9L
Hoppers	2x12L
Power (50Hz / 60Hz)	2.6kW / 2.8kW
Net/Ship Weight (Kg)	220 / 235
Net Dimensions (mm)	532x652x995
Ship Dimensions (mm)	570x800x1140
Power Supply	220V/1Ph/50Hz, 220V/1Ph/60Hz
Available Options	Airchute, Spinner, Lightbox



6795-C

Flavors	2
Capacity (250ml)	480 serves/hr
Cylinders	2x6.9L
Hoppers	2x12L
Power (50Hz / 60Hz)	4.0kW / 4.3kW
Net/Ship Weight (Kg)	250 / 270
Net Dimensions (mm)	553x651x1497
Ship Dimensions (mm)	710x830x1670
Power Supply	220V/1Ph/50Hz, 220V/1Ph/60Hz
Available Options	Airchute, Spinner, Lightbox

Slush & Shake

